


Order number: 100001

Technical data:

Lamp wattage (nominal value):	1000 W
Lamp wattage (rated value):	1000,0 W
Lamp voltage:	240 V
Luminous flux (nominal value):	22000 lm
Luminous flux (rated value):	22000 lm
Luminous efficiency:	22 lm/W
Colour temperature:	2800 K
Chromaticity coordinate x:	0.437
Chromaticity coordinate y:	0.405
Colour rendering:	100
Average life (nominal value):	2000 h
Rated lamp life time:	2000 h
Diameter:	12,0 mm
Contact distance L:	185,7 mm
Bulb form:	tubular
Bulb type:	clear
Base:	R7s
Reliable burning position:	p15
Packing unit (pcs.):	50/100/150
Dimmable:	Yes
Lumen maintenance factor*:	100 %
Warm-up time*:	none
Switching cycles*:	1000000
ILCOS:	HDG-1000-240-R7s-185,7
*:	according to EC No 244/2009

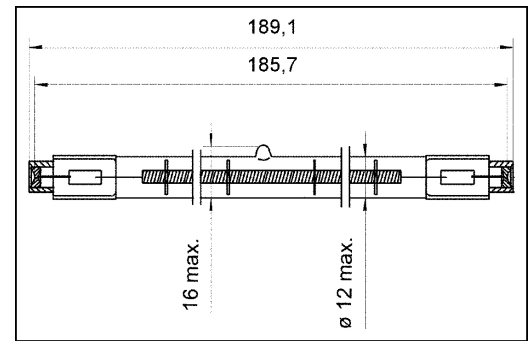

Advantages:

- Economic due to long average life, up to 28,000 hours
- High luminous efficacy
- Energy efficient

Application:

Application for large interior and exterior areas, e.g.:

- Historical Buildings
- Streets and parks
- Railway tracks
- Manufacturing premises
- Storage areas

Within the scope of the corresponding standards, variations of the declared values and tolerances might occur without prior notice.