
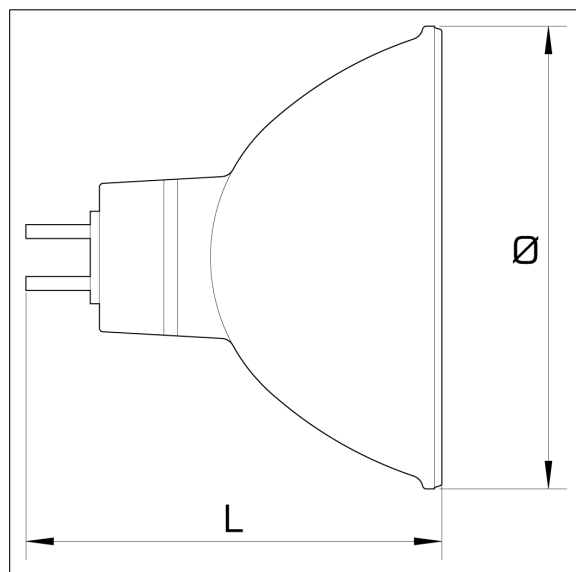


Order no.: 182059

**Techn. Values:**

Design:	clear
Wattage (W):	20
Voltage (V):	12
Beam angle:	60°
Luminous intensity (cd):	270
Colour temperature (K):	2900
Diameter (mm max.):	50,7
Length (mm max.):	44,9
Filament shapes:	c-8
Base:	GU5.3
Average life (h):	4500
Burning position:	u360
Packing unit:	50

**ADVANTAGES:**

- Reflector with aluminium coating
- Excellently suited for enclosed
- installation because of reduced heat to the rear
- Hardly any stray light to the rear
- UV protect (UV-P)
- Integrated, flush fitting cover glass
- Dimmable

**APPLICATION:**

in thermally critical areas, e.g.:

- Ceilings
- Furniture
- Extractor hoods
- Mirrors